





- Power design and installation works.
- Lifts and escalators installation works.
- Solar panels supply & installation services.
- Generator and appliances installation services.
- Telecom fiber line works.
- Other Electrical and Mechanical works.

Table of Contents

PART ONE.....	3
1. GENERAL	3
1.1 BACKGROUND AND COMPANY OVERVIEW	3
INTRODUCTION/HISTORY	3
MISSION	4
MAIN OBJECTIVE.....	4
VISION	5
1.2 COMPANY NAME AND ADDRESS	5
1.3 REGISTRATION	6
1.3.1 Tax Payer Registration.....	6
1.3.2 VAT Registration.....	7
1.3.3 Business License.....	8
1.3.4 Trade name.....	9
1.3.5 Business competency certificate	10
1.4 COMPANY MANAGEMENT	11
PART TWO	13
2. EXPERIENCE	13
2.1 PAST EXPERIENCE OF PROJECTS.....	13
2.2 PROJECT TESTIMONIALS	14
3. ORGANIZATIONAL STRUCTURE, RESOURCE AND STAFF PROFILE	28
3.1 STAFF	28
3.2 Equipment, machinery financial document.....	34
PART FOUR.....	35
PROPOSAL FOR THE PROJECT.....	35
4.1 Human resource and staff	35
4.2 Machineries and equipment's	35

PART ONE

1. GENERAL

1.1 BACKGROUND AND COMPANY OVERVIEW

INTRODUCTION/HISTORY

HADU Electro-Mechanical Engineering, was established in Ethiopia with the motive of offering a better professional assistance in the electro-mechanical sector. We pride ourselves on being skilled and experienced in all aspects of electrical construction and this, combined with our extensive knowledge has established us major players in the electrical industry. We believe we had secured some standard in all the works we engaged before and make some name out of it.

The company always retains basic staff includes mechanical and electrical designers and engineers, coupled with business administrators and technicians associated with facility assessment and asset sustainability. It has also client based management system that benefited the company to have reputable name it our clients.

HADU Electro-Mechanical Engineering was engaged in distribution works from Ethiopian electric power corporations in North Shoa region, in south wollo area, in different oromia areas and in Tigray region as well as design and supervision works with different local firms, street light and compound lighting works in military camps, power tower erection works under KEC international in oromia region around seoku area and others.

MISSION

HADU Electro-Mechanical Engineering has built a strong reputation for delivering quality service, on time and at a competitive price with quality assurance system. This company enjoys a diverse and talented work force which is firmly committed to the customer and company's success for now and beyond. A provider of the highest quality engineering services, and to implement solutions for achieving full customer satisfaction delivered through the safe technical competence and professional integrity of all our employees.

MAIN OBJECTIVE

HADU Electro-Mechanical Engineering aim is to meet our customers' needs and requirements and also ensure Quality Assurance System by

- controls quality of various equipment, materials, services and erection / installation to relevant standards, specifications drawings and technical requirements Intended to be mutually agreed between company's and owner / client / consultant.
- Providing them with quality service of highest standard to meet these aims
- Understand and meet our customers' needs and requirements.
- Implementing a management system to the highest standards.
- Ensuring that all members of staff are fully aware of the relevance and importance of their activities as part of their quality management system and the achievements of the company's objectives.
- Training employees to perform the duties required by his or her specific activity.
- Regularly reviewing this policy and our objectives and seeking to continually improve the effectiveness of the system.
- Monitoring and enhancing our customers' satisfaction with the efficient provision of our services.

VISION

We always strive to be the leading provider of electro-mechanical solutions and services and also building a partnership with our customers is paramount in creating long term relationships. We providing smarter and better electro-mechanical engineering services aimed at enabling its customers around the country and in the region.

CORE VALUES


- Focused on quality, costs and efficiency of electrical materials.
- Provide professional and technical excellence.
- To cultivate long term relationship with our clients.
- Human resources development and knowledge building.
- Managing transparency and professionalism.
- Emphasis on processes and predictability.
- Acting with honesty integrity and ethics.
- To support our employees in a way that fosters learning and growth.

1.2 COMPANY NAME AND ADDRESS

Company Legal Name	HADU Electro Mechanical Engineering
Place of registration	City:- Addis Ababa , Ethiopia Sub city: - Bole Woreda: - 03 Building:- BADMAS Office no. 04 (in front of Abem Hotel)
Contact address	Telephone:- +2519-30-303828/ +2519-11-791270 Email:- mirishtam@gmail.com

1.3 REGISTRATION

1.3.1 Tax Payer Registration

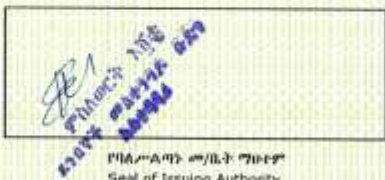 የኢትዮጵያ ፌዴራላዊ ዴሞክራሲያዊ ሪፐብሊክ የአዲስ አበባ ከተማ አስተዳደር ገቢዎች ባለስልጣን Federal Democratic Republic of Ethiopia ADDIS ABABA CITY ADMINISTRATION REVENUE AUTHORITY የግብር ከፋይ ምዝገባ ሰርተፊኬት TAXPAYER REGISTRATION CERTIFICATE 	
የግብ ከፋይ መለያ ቁጥር: Taxpayer Identification Number:	0005006707
የድርጅት/የግለሰብ ስም: Name of Business/Individual:	መሀል አድማሱ አለሙ MEHARI ADMASSU ALEMU
የተመዘገበ አድራሻ/Registered Address:	
ክልል: Region:	አዲስ አበባ ADDIS ABABA
ዞን/ክ/ከተማ: Zone/Sub City:	ልደታ LIDETA
ወረዳ: Woreda:	
ቀበሌ /በአማርኛ/: Kebele/Farmer's Assoc.:	ወረዳ 08 WOREDA 08
የቤት ቁጥር: House No.:	new/4/410
ESIC Sub-group:	50320 - ELECTRICAL CONTRACTING
ESIC Sub-group:	85220 - RENTING OF CONSTRUCTION AND CIVIL ENGINEERING MACHINERY AND
የሰጠው ተቋም: Issuing Authority:	የአዲስ አበባ ከተማ አስተዳደር ገቢዎች ባለስልጣን ADDIS ABABA CITY ADMINISTRATION REVENUE AUTHORITY
የተሰጠበት ቀን: Date of Issuance:	16 TAHSAS 2010 25-DEC-17
ይህ የምስክር መረቀቅ የግብር ከፋይነት ጭነት የግብር ከፋይነት ምዝገባ ሰነድ ሲሆን ከዚህ ቀደም የግብር ከፋይነት ምዝገባ ሰነዶች ካሉ በዚህ ሰነድ የተተክሉ መሆናቸውን ነው። ከላይ በተመለከተው መረጃ ላይ ግንኙነት እያሳየ ለውጥ ሲደረግ ግብር ከፋይ ለማመልከት የግብር ሰብሳቢ ጽ/ቤት የግብዓት ጉዴታ አለበት። This certificate represents the sole and only registration as a taxpayer and supersedes all prior registration documentation. The taxpayer is responsible for notifying the appropriate Tax Office of any changes to the above information.	
የሰርተፊኬት ቁጥር: Certificate No.:	1315114181000
 የሰጠው ጽ/ቤት ግብዓት Seal of Issuing Authority	

1.3.2 VAT Registration


በኢትዮጵያ ፌዴራላዊ ዲሞክራሲያዊ ሪፐብሊክ
የኢትዮጵያ ገቢዎችና ጉምሩክ ባለሥልጣን
የተጨማሪ እሴት ታክስ
የምዝገባ የምስክር ወረቀት
The Federal Democratic Republic of Ethiopia
Ethiopian Revenues and Customs Authority
Value Added Tax
Registration Certificate

አቶ/ሀገር መደም የድርጅት ስም: _____ ሙሉ ስም: _____
 አገልግሎት/ሰራተኛ: _____ አድራሻ: _____ የጋ/ክ/ሀ/ከተማ: _____ ሀገር: _____
 ቀበሌ/ግንብ/ክ/ከተማ: _____ የፍትሕ ቁጥር: _____ ስልክ ቁጥር: _____ 251911791270 _____
 የገንዘብ ቁጥር: _____ የፍትሕ ቁጥር: 0000000707 የፍትሕ ቁጥር: _____ የፍትሕ ቁጥር: 285/1994
 አንቀጽ 16 መደም አንቀጽ 18 መደም የፍትሕ ቁጥር: 1003440012 ከ _____ 2001 ዓ.ም. ጀምሮ ስለተጀመረ
 ይህ የምዝገባ ሰነድ ለተጨማሪ ተገቢነት ተገቢ ነው፡፡

Mr./s or Company Name: **MEHARI ADMASSU ALEMU**
 Trade name (if any): _____
 Address (Region): **ADDIS ABABA** Zone / Sub city: **LIDETA** Woreda NO **WOREDA-141**
 Kebele/Farmers Ass: **WOREDA 08** House No. new/4/410 Telephone No. **251911791270** P.O. Box _____
 Whose Taxpayer Identification Number (TIN) is: **0000000707** has been registered in accordance with VAT Proclamation No. **285/2002**
 Article 16 of Article 18 and hence, this VAT registration Number **1003440012** has been issued starting from **12-MAR-2009**

25-DEC-2017/ 4283601000

የደንበኞች አገልግሎት ማስፈከቻ ማስፈከቻ
 Customers Service Directorate Director

1.3.3 Business License

 **በአዲስ አበባ ከተማ አስተዳደር ንግድ ቢሮ**
Addis Ababa City Administration Trade Bureau

ሴ.ቁ. N: 2856832

የዋናው ስም/የፋይል ቁጥር (TIN) 0995006/03
የንግድ መዝገብ ቁጥር (K/AA/1/5002375/2013)
የቀዳሚው ንግድ ፊደል ቁጥር 10/1/4/11934/01
የንግድ ሥራ ፊደል ቁጥር 14/048/8152/2004
የንግድ ሥራ ቁጥር ቁጥር 6/12/2009
የቀዳሚው የውጪ ቀን 30/12/2004
የተሰጠበት ቀን 22/3/2014
የደብዳቤ ቀን 22/3/2014

የንግድ ሥራ ፊደል
በንግድ ምዝገባና ፊደል አዋጅ ቁጥር 980/2008 መሰረት ተሰጠ

Business License
Issued Under Commercial Registration and Business license proc.No 980/2016

1. የግለሰብ/ድርጅቱ ስም	መሀረ አድማሱ አለሙ	1. Owner/Company Name	MEHARI ADEMASU ALEMU
2. ቤግነት	ኢትዮጵያዊ	2. Nationality	Ethiopian
3. የንግድ ስም		3. Trade Name	
4. ሥራ አስኪያጅ ስም	አቶ መሀረ አድማሱ አለሙ	4. General Manager Name	Mr. MEHARI ADEMASU ALEMU
5. የንግድ ድርጅቱ አድራሻ		5. Business Address	
በአዲስ አበባ	ዞን/ክፍለ ከተማ	Region	Addis Ababa
ወረዳ	13	Woreda	13
የቤት ቁጥር	አዲስ	House No.	አዲስ
ፋክስ	አ.ማይል	Fax	
6. የንግድ ሥራ መስክ	(51213)(51213)የኢሊክትሮኒክስ ሥራና ሌሎችም ስራዎችን ለማከናወን የሚችል ሥራ ተቋራጭ	6. Field of Business	(51213)(51213)Electrical Contracting & Electromechanical work Contractor
7. ካፒታል በኢት.ብር	914,131.00	7. Capital in ETB	914,131.00
ይህ የንግድ ፊደል ዓመት	22/3/2014		
የሥራው ስም/Name of Official	መሀረ አድማሱ አለሙ		
ፊርማ/Signature			

በአዲስ አበባ ከተማ አስተዳደር ንግድ ቢሮ
Woyanitu Mekonnen Bayane
ምዝገባና ፊደል ቢሮ

Seal

12/1/2021

ለ 2014 ታዲላ

ማሳሰቢያ: 1. ይህ የንግድ ፊደል በዓመት ፊደል ቁጥር 980/2008 መሠረት እንደ የባንክ ሰነድ በአዋጅ በተቀመጠው መሰረት መታደስ አለበት።
N.B. This License Shall be renewed in accordance with Proclamation No. 980/2008 as per the fiscal year.

2. ይህ የንግድ ፊደል የመስከር ወረቀት በዋስትና ወይም በእዳ ሊያገለግል አይችልም።
The holder of this License is forbidden for surety ship or debt.



Scanned by CamScanner

1.3.4 Trade name

በኢትዮጵያ ፌዴራላዊ ዲሞክራሲያዊ ሪፐብሊክ
የኢንዱስትሪ ክትትልና አስተዳደር
ንግድና ኢንዱስትሪ ልማት ቢሮ

ሴራቁ No 155687



የንግድ ስም የምዝገባ ቁጥር 10/1/3/6/11993/

የዋና የምዝገባ ቁጥር: 10/1/13550/01

የንግድ ፈቃድ ቁጥር 10/1/3/11993/01

የንግድ ስም ምዝገባ ምስክር ወረቀት

በንግድ ምዝገባና ፈቃድ ስልጣን ስምድ ቁጥር 67/1989 አንቀጽ 23 መሰረት የተሰጠ

1. ስም መሀሪ አደማሱ አሰው

2. የንግድ ስራ:

ዘርፍ አገልግሎት

መስክ ኤሌክትሮ ሜካኒካል (ደረጃ-5)

3. የንግድ ድርጅቱ አድራሻ

ክፍሉ ከተማ ፖስታ ቀበሌ 09/15 የቢት.ቁ 221

የሰሰኪ.ቁ 0911791270 ፋክስ ፖ.ሳ.ቁ

4. የንግድ ስም ሐዱ ኤሌክትሮ ሜካኒካል ኢንጂነሪንግ

5. ክፍል የተሰጠው የንግድ ስም የአመሰካቻ/ኛ/ የንግድ ስም ተደርጎ የተመዘገበ መሆኑን አናረጋግጣለን።

ደህ የምስክር ወረቀት ዘፈ 02/07/2001 ዓ.ም በአዲስ አበባ ከተማ ተሰጠ።



የሀ.ንፈ.ወ. ስም
ፊርማ

15/5/2001

1.3.5 Business competency certificate



የገዢ የሥራ ቁጥር 10/113550/01
Principal Registration No
የቢሳት ግራገግ ሙያ ቁ. 50330 - 247

የንግድ ሥራ ቢሳት ግራገግ ምስክር ወረቀት

የአዲስ አበባ ኢንጅነሪንግ ባለስልጣን በአዋጅ ቁጥር 686/2002 የንግድ ሥራ ቢሳት ግራገግ ምስክር ወረቀት ለመስጠት በተሰጠው ሥልጣን መሠረት ለ ሐዱ ኤሌክትሮ ሜካኒካል ኢንጂነሪንግ በንግድ ሚኒስቴር ሕጎችና ደንቦች እንዲሁም የኤሌክትሪክና ኤሌክትሪክ ነክ ሙያ የሚጠይቀውን ስነምግባር በማከበር ለመሥራት የሚያስችል የኤሌክትሮ ሜካኒካል ሥራ ተቋራጭ ደረጃ አምስት ንግድ ሥራ ፈቃድ እንዲያወጡ ቢሳት ያላቸው መሆኑን በማረጋገጥ ይህ የምስክር ወረቀት 1፣ 2፣ 3 ዛሬ ግንቦት 12 ቀን 2006 ዓ.ም. ተሰጥቷል፡፡

የኤሌክትሪክና ኤሌክትሪክ ነክ ሙያ ሥራ ተቋራጭ ደረጃ አምስት ንግድ ሥራ ፈቃድ

1. ይህ የምስክር ወረቀት ለንግድ ሥራ ምስክር ወረቀት ወይም ለንግድ ሥራ ለማግኘት አይገለጽም፡፡
2. ይህ የምስክር ወረቀት የሚያስገልጽበት ለግብርና ባለቤት ጋራ ተረድሞ በቢሳት ግራገግ ባለስልጣን ማከተም ይቻላል፡፡ በማንኛውም መታደስ ይኖርበታል፡፡
3. ይህ ስርተዳድር የሚያስገልጽበት ለሐዱ ኢንጅነሪንግ 30 2006 ዓ.ም. ብቻ ነው፡፡

Business Competency Certificate

The Ethiopian ENERGY AUTHORITY, by the power vested in proclamation No. 686/2010 to issue Certificate of Business Competency and in Recognition of **AHADU ELECTROMECHANICAL ENGINEERING** In accordance with the requirements and the rules and regulation of Ministry of Trade and professional ethics of electric and electric related areas, has authorized the issuance of this Business Competency Certificate 1:2 :3 of **ELECTRO MECHANICAL CONTRACTOR GRADE FIVE** On Day of **22** month of **05** in the year **2014** SEFA

HAIRAM SEFA
Electric & Electric Related
Competency Certification Directorate


1. This Business Competency Certificate shall not serve as a Trade Registration Certificate or as Trade License.
2. This Certificate is valid only if it is signed by the authorized personnel and stamped thereof with Ethiopian energy authority Official Stamp.
3. This Certificate is valid only till July 7/2014 G.C.

1.4 COMPANY MANAGEMENT

HADU Elector-Mechanical Engineering company is structured and organized in such a way to enhance its cooperate value and fulfill social responsibility. The company is currently headed with three deputies (Finance head, Projects Head and Human resource). The project management head

who are led power design and installation works of the company

HADU ORGANIZATIONAL CHART

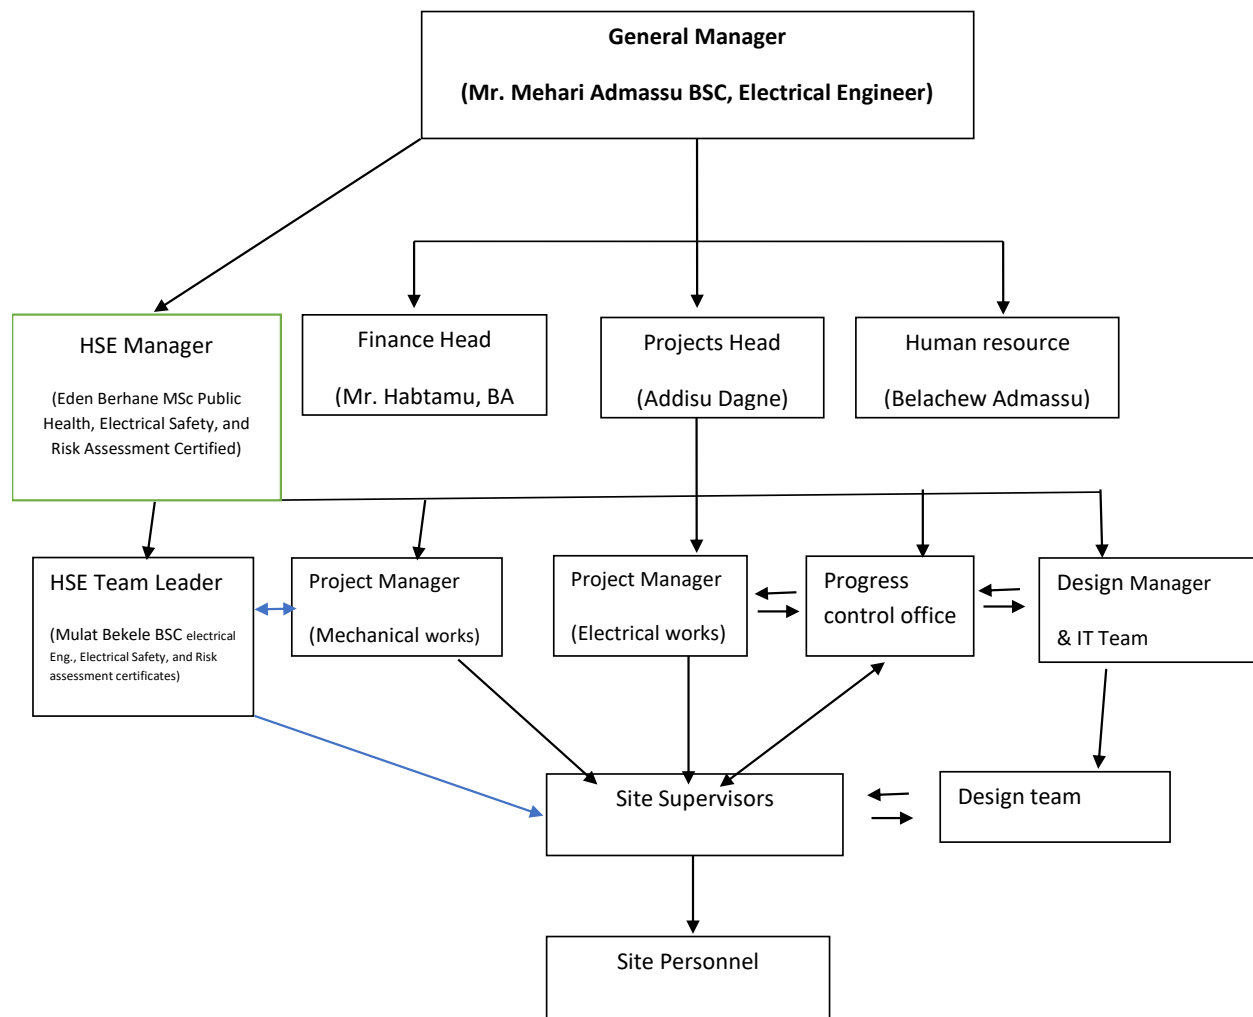

PART TWO

2. EXPERIENCE

2.1 PAST RELEVANT EXPERIENCES

The following are some of projects accomplished and under way by the company with their contract agreements annexed.

1. Completion of UEAP B_2/01 Lot_6 in around North Shao and south wollo areas
2. Completion of UEAP B_2/03 Lot_74 in around all over Tigray region
3. Completion of UEAP B_4/08 Lot_78 all in around Tigray
4. Completion of ITACA Garment Connection to the Grid in Tigray Region
5. Completion of Underground interconnection of DBL industries LTD in Tigray
6. Underway contract with Safaricom Ethiopia in Amhara region for Commercial Power line connection services

Starting Month/ Year	Ending Month/Y ear	Contract Identification	Contract amount	Role of Applicant
2009E.C	20011	✓ Construction of MV and LV distribution Networks to Electrify Towns and villages ✓ Construction of 122km concrete pole medium voltage line works and more than 52 km low voltage distribution works in North shoa oromia region, Debrebirhan-Sheno 33kv line and south wello areas. ✓ Name Of Empolyer:- was Universal Electric Access process(UEAP)	✓ 4.3 million USD	Contractor

		(Addis Ababa, around Arat killo area special name <u>Eri Bekentu</u>)		
2012E.C	2014 E.C	✓ Construction of MV and LV distribution Networks to Electrify Towns and villages ✓ Construction of 96km concrete pole 33kv double line from Tekeze HPP to AbiAdi town and installation of net stations and upgrading of other five villages Medium voltage lines. ✓ Name of Empolyer:- was Universal Electric Access process(UEAP) (Addis Ababa, around Arat killo area special name <u>Eri Bekentu</u>)	✓ 3.2 million USD	Contractor
2017E.C	2020 E.C	✓ Construction of MV and LV distribution Networks to Electrify Towns and villages ✓ Contract No. UEAP B_2/01 Lot_ 6 ✓ Contract No. UEAP B_1/03 Lot_ 74 ✓ Installation of LV Underground lines at D.B. Blanket Factory. ✓ Name of Employer:- Universal electric access process(UEAP) (Addis Ababa, Around Arat Killo(Eri Bekentu Area))	✓ 7.1 million USD	Contractor
2022	2024	✓ Commercial Power line connection services ✓ SOW Ref. No: 002 ✓ Employer Safaricom Ethiopia	Above 15 million USD	

2.2 RELATED WORK EXPERIENCE TESTIMONIALS

The annexed letters of testimonials are given to the company for the successful completion of its projects accomplished and the site visit can be arranged up on request for the remaining.

➤ **SPECIFIC RELATED WORK EXPERIENCE TESTEMONIAL ATTACHEMENT**

ኢትዮጵያ ኤሌክትሪክ ኃይል ኮርፖሬሽን ETHIOPIAN ELECTRIC POWER CORPORATION

ዋና መ/ሥራያ ቤት የፖ.ሣ.ቁጥር 1233
የቲ.ሊ.ክስ ቁጥር ኢ.ኤ. 11 አዲስ 21023
የቲ.ሊ.ግራም አድራሻ ኢ.ሊ.ክስ አዲስ አበባ
ስልክ ማዋሪያ 55 08 11 - 12



Head Office P.O.Box 1233-Addis Ababa
Cable: Electric Addis Ababa
Telex : EEPCO Addis Ababa 21023
Telephone PBX 55 08 11 - 12

የደረሰበዎት ቁጥር
Your Ref:

የተጻፈበት ቀን
Your letter dated

የደረሰበዎት ቁጥር
Our Ref:

10.5/D/166
13 MAR 2013
Date

FINAL ACCEPTANCE CERTIFICATE

Contract UEAP B-2/00 LOT-6 with Cont. Number 67.2/D/683/02

To: HADU ELECTROMECHANICAL ENGINEERING.

Dear Ladies and /or Gentlemen,

Pursuant to GCC Clause 27 (Defect Liability) of the General Conditions of the Contract entered into between yourselves and the Employer dated 07 July, 2009 relating to the Construction of Medium voltage and Low voltage distribution networks, to electrify Sixteen (16) towns, we hereby notify you that you already commissioned and energized the towns before one year.

The line is operational without defect for the last one year and the defect liability period is completed at this moment. Pursuant to clause 27 specified on the general condition of the contract we certify this certificate on the date March 13, 2013 notifying that the following parts of the facilities were complete and operational without defect within the period of defect liability.

Construction Work for Commissioned Towns.

No	Name of Town	Distribution Network Support Type (Medium Voltage and Low Voltage)	Voltage Level	Stringing		No. of transformer station	Contract Amount (Birr)	Commissioning date
				MV(Km)	LV(Km)			
1	Adere Ejersa	Wooden Pole	33KV	2.8	0.84	1*100KVA	111,431.56	02/08/2011
2	Gadula Moye	Wooden Pole	33KV	5.75	0.64	1*50KVA	153,762.45	02/08/2011
3	Medida Zuria	Wooden Pole	33KV	0.77	1.4	1*50KVA	83,748.57	02/03/2011
4	Chomye	Steel Pole	33KV	32.1	1.416	1*50KVA	862,838.29	10/11/2011

In accordance with the terms of the contract, the Employer hereby takes over the said parts of the facilities, together with the responsibility for the care, custody and the risk of loss thereof on the date March 13, 2013.



Best Regards

Milton Matusala
Chief Officer, UEAP Project Engineering

የኢትዮጵያ ኤሌክትሪክ ኃይል ኮርፖሬሽን
ETHIOPIAN ELECTRIC POWER CORPORATION

ዋና መምሪያ ቤት የፖ.ሣ.ቁጥር 1233
የቲ.ሲ.ቢ. ቁጥር ኢ.ኤ.ፌ.ባ. ኦዲስ 21023
የቴሌፎን ቁጥር ኤሌክትሪክ ኦዲስ ኦባ
ሰዓት ማዕረግ 55 08 11 - 12



Head Office P.O.Box 1233-Addis
Ababa
Cable: Electric Addis Ababa
Telex : EEPCO Addis Ababa 21023
Telephone PBX 55 08 11 - 12

የደረሰበት ቁጥር
Your Ref:

የተጻፈበት ቀን
Your letter dated

የደረሰበት ቁጥር
Our Ref:

ቀን
Date

10.5/10/147
31 JAN 2013

Operational Acceptance Certificate

Contract UEAP B - 2/01 LOT- 6

To: HADU ELECTROMECHANICAL ENGINEERING.

Dear Ladies and/or Gentlemen,

Pursuant to GCC Clause 24 (Completion of the Facilities) of the General Conditions of the Contract entered into between yourselves and the Employer dated 07 July 2009, relating to the Construction of MV & LV distribution networks, we hereby notify you that the following parts of the Facilities were complete on the date specified below, and that, in accordance with the terms of the Contract, the Employer hereby takes over the said parts of the Facilities, together with the responsibility for care and custody and the risk of loss there of on the date mentioned below.

No.	Town Name	Voltage level (KV)	Executed Length (KM)		Transformer Erected (KVA)	Commissioned Date (G.C)
			MV Line	LV Line		
1	Adere ejersa	33	2.8	0.84	1*100	02/08/2011
2	Amate goro	33	4.41	2.17	2*50	31/05/2012
3	Chole senkole	33	0.4	2.5	1*200	19/06/2012
4	Ejersa	33	4	2.21	1*50	19/06/2012
5	Gadula moye	33	5.75	0.64	1*50	02/08/2011
6	Layi kanbolcha	33	56.04	3.24	2*50	31/05/2012
7	Lega hola	33	5.2	2.54	1*50	16/08/2012
8	Mendida zuria	33	0.77	1.4	1*50	02/03/2011
9	Mogoro	33	2.1	2.08	1*50	31/05/2012
10	Sura	33		3.83	2*50	19/06/2012
11	Tebo	33	3.1	0.68	1*50	19/06/2012
12	Tuku & kora	33	3.01	2.43	2*50	31/05/2012
13	Wantu	33	1	1.36	1*25, 1*50	31/05/2012
14	Yeke saden	33	6.93	3.77	1*50	19/06/2012
15	Chomiye	15	32.1	1.416	1*50	10/11/2011

However, you are required to complete the outstanding issues raised and delivered to you during the commissioning of the facilities as soon as practicable.

This letter does not relieve you of your obligation to complete the execution of the Facilities in accordance with the Contract nor of your obligations during the Defect Liability Period.

Very truly yours,

FARIS ADEM

Chief Officer, UEAP Project Engineering

የኢትዮጵያ ኤሌክትሪክ ኃይል ኮርፖሬሽን
ETHIOPIAN ELECTRIC POWER CORPORATION

ዋና መምሪያ ቤት የፖ.ሣ.ቁጥር 1233
 የቀበሌና ቁጥር ኢ.ኤ.ኤ. 21023
 የቴሌፎን አድራሻ ኤሌክትሪክ ኤ.ኤ.ኤ. 55 08 11 - 12



Head Office P.O.Box 1233-Addis
 Ababa
 Cable: Electric Addis Ababa
 Telex : EEPCO Addis Ababa 21023
 Telephone PBX 55 08 11 - 12

የደረሰበት ቁጥር
 Your Ref:

የተጻፈበት ቀን
 Your letter dated

የደረሰበት ቁጥር
 Our Ref:

ቀን 31 JAN 2013
 Date

Completion Certificate

Contract UEAP B - 2/01 Lot-6

To: HADU ELECTRO MECHANICAL ENGINEERING

Dear Ladies and /or Gentlemen,

Pursuant to GCC Clause 24 (Completion of the Facilities) of the General Conditions of the Contract entered into between your selves and the Employer dated 07 July 2009, relating to the Construction of MV & LV distribution networks, we hereby notify you that the following parts of the Facilities were complete on the date specified below, and that, in accordance with the terms of the Contract, the Employer hereby takes over the said parts of the Facilities, together with the responsibility for care and custody and the risk of loss there of on the date mentioned below.

No.	Town Name	Voltage Level (KV)	Type of pole	Executed Length (KM)		Transformer Erected (KVA)	Commissioned Date (G.C)
				MV Line	LV Line		
1	Adere ejersa	33	Wooden	2.8	0.84	1*100	02/08/2011
2	Amate goro	33	Wooden	4.41	2.17	2*50	31/05/2012
3	Chole senkole	33	Concrete	0.4	2.5	1*200	19/06/2012
4	Ejersa	33	Concrete	4	2.21	1*50	19/06/2012
5	Gadula moye	33	Wooden	5.75	0.84	1*50	02/08/2011
6	Layi kanbolcha	33	Concrete	56.04	3.24	2*50	31/05/2012
7	Lega hola	33	Concrete	5.2	2.54	1*50	16/08/2012
8	Mendida zuria	33	Wooden	0.77	1.4	1*50	02/03/2011
9	Mogoro	33	Wooden	2.1	2.08	1*50	31/05/2012
10	Sura	33	Concrete	4.3	3.83	2*50	19/06/2012
11	Tebo	33	Wooden	3.1	0.68	1*50	19/06/2012
12	Tuku &kora	33	Wooden	3.01	2.43	2*50	31/05/2012
13	Wantu	33	Wooden	1	1.36	1*25,1*50	31/05/2012
14	Yeke saden	33	Concrete	6.93	3.77	1*50	19/06/2012
15	Chomiye	15	Steel	32.1	1.416	1*50	10/11/2011

However, you are required to complete the outstanding issues raised and delivered to you during the commissioning of the facilities as soon as practicable.

This letter does not relieve you of your obligation to complete the execution of the Facilities in accordance with the Contract nor of your obligations during the Defect Liability Period.



Very truly yours,

[Signature]
 Chief Officer, UEAP Project
 Engineering

የኢትዮጵያ ኤሌክትሪክ ፖወር ኮርፖሬሽን
ETHIOPIAN ELECTRIC POWER CORPORATION

የዋና መ/ሥራዊት ቤት የፖ.ሣ.ቁፕሮ 1233
 የቤላክስ ቁፕሮ ኢ.ኤ.ሪ.ታ.ክ.ሲ.ስ 21023
 የቤላግራም አድራሻ ኤሌክትሪክ አዲስ አበባ
 ስልክ ማዕረፍ 55 08 11 - 12



Head Office P.O.Box 1233-Addis Ababa
 Cable:Electric Addis Ababa
 Telex : EEPKO Addis Ababa 21023
 Telephone PBX 55 08 11 - 12

የደብዳቤያችሁ ቁፕሮ
 Your Ref:

የተጻፈበት ቀን
 Your letter dated

የደብዳቤያችን ቁፕሮ
 Our Ref:

105/0/233
 24 JUN 2013
 ቀን
 Date

FINAL ACCEPTANCE CERTIFICATE

Contract UEAP B-2/00 LOT-6 with Contract Number 67.2/D/683/02

To HADU ELECTROMECHANICAL ENGINEERING
Addis Ababa

Dear Ladies and /or Gentlemen,

Pursuant to GCC Clause 27 (Defect Liability) of the General Conditions of the Contract entered into between yourselves and the Employer dated 07 JULY, 2009 relating to the Construction of Medium voltage and Low voltage distribution networks, to electrify Sixteen (16) towns, we hereby notify you that you already commissioned and energized the towns before one year.

The line is operational without defect for the last one year and the defect liability period is completed at this moment. Pursuant to clause 27 specified on the general condition of the contract we certify this certificate on the date June 24 , 2013 notifying that the following parts of the facilities were complete and operational without defect within the period of defect liability.

Construction Work for Commissioned Towns.

No.	Town Name	Distribution Network Support Type(Medium Voltage and Low Voltage)	Voltage level (KV)	Executed Length (KM)		No. of transformer station	Contract Amount (Birr)	Commissioned Date (G.C)
				MV Line	LV Line			
1	Amate goro	Wooden	33	4.41	2.17	2*50	868,152.57	31/05/2012
2	Chole senkole	Concrete	33	0.4	2.5	1*200	133,078.19	19/06/2012
3	Ejersa	Concrete	33	4	2.21	1*50	2,966,100.60	19/06/2012
4	Layi kanbolcha	Concrete	33	58.04	3.24	2*50	2,813,735.98	31/05/2012
5	Lega hola	Concrete	33	5.2	2.54	1*50	338,978.72	16/02/2012
6	Mogoro	Wooden	33	2.1	2.08	1*50	97,434.55	31/05/2012

No.	Town Name	Distribution Network Support Type (Medium Voltage and Low Voltage)	Voltage level (KV)	Executed Length (KM)		No. of transformer station	Contract Amount (Birr)	Commissioned Date (G.C)
7	Sura	Concrete	33	4.3	3.83	2*50	245,238.10	19/06/2012
8	Tebo	Wooden	33	3.1	0.68	1*50	100,492.31	19/06/2012
9	Tuku & kora	Wooden	33	3.01	2.43	2*50	78,137.77	31/05/2012
10	Wantu	Wooden	33	1	1.36	1*25, 1*50	46,048.01	31/05/2012
11	Yeke saden	Concrete	33	6.93	3.77	1*50	588,763.81	19/06/2012

In accordance with the terms of the contract, the Employer hereby takes over the said parts of the facilities, together with the responsibility for the care, custody and the risk of loss thereof on the June 24, 2013.

Best Regards,

Million Mamo
Chief Officer, UEAP Project
Engineering



የኢትዮጵያ ኤሌክትሪክ ኃይል ኮርፖሬሽን
ETHIOPIAN ELECTRIC POWER CORPORATION

የባለገቢያት ቤት የፖ.ሣ.ቁጥር 1233
የክሊኒክ ቁጥር ኢ.ኤ.ቃ.ክ አዲስ 21023
የቴሌግራም አድራሻ ኤሌክትሪክ አዲስ አበባ
ስልክ ማዕረፍ 55 08 11 - 12



Head Office P.O Box 1233-Addis
Ababa
Cable-Electric Addis Ababa
Telex : EEPKO Addis Ababa 21023
Telephone PBX 55 08 11 - 12

የደረሰበት ቁጥር
Your Ref:

የተጻፈበት ቀን
Your letter dated

የደረሰበት ቁጥር
Our Ref:

ቀን
Date

10.5/10/179
7 OCT 2011

Operational Acceptance Certificate

Contract UEAP B - 2/01 Lot-6

To: HADU ELECTRO MECHANICAL ENGINEERING

Dear Ladies and /or Gentlemen,

Pursuant to GCC Clause 24 (Completion of the Facilities) of the General Conditions of the Contract entered into between yourselves and the Employer dated 07 July, 2009, relating to the Construction of MV & LV distribution networks, we hereby notify you that the following parts of the Facilities were complete on the date specified below, and that, in accordance with the terms of the Contract, the Employer hereby takes over the said parts of the Facilities, together with the responsibility for care and custody and the risk of loss there of on the date mentioned below.

No.	Town Name	Voltage level (KV)	Executed Length (KM)		Transformer Erected (KVA)	Commissioned Date (G.C)
			MV Line	LV Line		
1	Mendida Zuria	33	0.77	1.4	1*50	02/08/2011
2	Gadula Moya	33	5.75	0.64	1*50	02/08/2011
3	Adere Ejersa	33	2.8	0.84	1*100	02/08/2011

However, you are required to complete the outstanding issues raised and delivered to you during the commissioning of the facilities as soon as practicable.

This letter does not relieve you of your obligation to complete the execution of the Facilities in accordance with the Contract nor of your obligations during the Defect Liability Period.



Very truly yours,

Million Matusala

Chief Officer, UEAP Project Engineering

የኢትዮጵያ ኤሌክትሪክ ኃይል

ETHIOPIAN ELECTRIC POWER
TIGRAY REGION UEAP OFFICEየስልክ ቁጥራችን 034-441-9459
የፋክስ ቁጥራችን 034-440-2233TEL NO 034-441-9459
FAX 034-440-2233

የደብዳቤ የቅጽ ቁጥር

OUR Ref: 3320/UE/2007

የተጻፈበት ቀን

OUR Letter dated 25/09/2007

Operational Acceptance CertificateContract UEAP B 2/2003 LOT 74.To: HADU ELECTRO MECHANICAL ENGINEERING

Dear Ladies and /or Gentlemen,

Pursuant to GCC Sub-Clause 25.3 (Operational Acceptance) of the General Conditions of the Contract entered between yourselves and the Employer dated JAN, 2013, relating to the construction of Medium voltage distribution networks, we hereby notify you that the following parts of the Facilities were complete on the date specified below and that in accordance with the terms of the contract, the Employer here by takes over the said part /s / of the facilities, together with the responsibility for care & custody and the risk of loss there on the date specified below.

No.	Town Name	Voltage level (KV)	Executed Length(KM)		Transformer Erected (KVA)	Commissioned Date (E.C)
			MV Line	LV Line		
1	HADNET	33	5.6K.m	0	1*100KVA	05/10/2006
2	MELFA	33	5.4K.m	0	1*100,1*50	04/10/2006
3	TEKEZE - YECHLA LINE	33	54.942	0	0	22/07/2007
4	SHEWATE - HGUM AGBE LINE	33	13.984	0	0	22/07/2007

This letter does not relieve you of your obligation to complete the execution of the Facilities in accordance with the Contract nor of your obligations during the Defect Liability Period.

With regards,

C.C:-

- > UEAP Tigray Region Chief Officer
- > UEAP Tigray Region Planning & Engineering office
- > Archives

Mekelle

Abrahatsion Abraha
Abrahatsion Abraha
Tigray Region Ueap
Planning & Engineering Officer



የኢትዮጵያ ኤሌክትሪክ ኃይል

ETHIOPIAN ELECTRIC POWER
TIGRAY REGION UEAP OFFICEየስልክ ቁጥሩ 034-441-5024
የፋክስ ቁጥሩ 034-440-2233TEL NO 034-441-5024
FAX 034-440-2233

የደረሰበት ቁጥር

OUR Ref: 3391 P76/2007

የተጻፈበት ቀን

OUR Letter dated 26/09/2007

Operational Acceptance CertificateContract UEAP B 2/2003 LOT 43,To: Hadu Electromechanical Engineering

Dear Ladies and /or Gentlemen,

Pursuant to GCC Sub-Clause 25.3 (Operational Acceptance) of the General Conditions of the Contract entered between yourselves and the Employer dated APRIL, 2012, relating to the construction of Low voltage and Medium voltage distribution networks, we hereby notify you that the following parts of the Facilities were complete on the date specified below and that in accordance with the terms of the contract, the Employer here by takes over the said part /s / of the facilities, together with the responsibility for care & custody and the risk of loss there on the date specified below

No.	Town Name	Voltage level (KV)	Executed Length(KM)		Transformer Erected (KVA)	Commissioned Date (E.C)
			MV Line	LV Line		
1	Adiha	33	12.93		2*100	01/112006

This letter does not relieve you of your obligation to complete the execution of the Facilities in accordance with the Contract nor of your obligations during the Defect Liability Period.

With regards,

C.C:-

- U EAP Tigray Region Chief Officer
- U EAP Tigray Region Planning & Engineering office
- Archives

Mekelle

Abrahatsion Abrara
Tigray Region Ueap
Planning & Engineering Officer



የኢትዮጵያ ኤሌክትሪክ ኃይል ኮርፖሬሽን
ETHIOPIAN ELECTRIC POWER CORPORATION

የቢሮ ስልክ: 55-08-11-12
የቴሌግራም አድራሻ: አዲስ አበባ
የቴሌፎክስ አድራሻ: አዲስ አበባ



Head Office P.O. Box 1233-Addis Ababa
Cable: Electric Addis Ababa
Telex: EEPCO Addis Ababa 21023
Telephone PBX: 55-08-11-12

የደንበኛው ቁጥር: _____ የተጻፈበት ቀን: _____ የደንበኛው የቢሮ ቁጥር: 704/10/146
Your Ref: _____ Your letter dated: _____ Our Ref: _____

ቀን: 31 JAN 2013
Date: _____

Completion Certificate

Contract UEAP B - 2/01 Lot-6

→ To: HADU ELECTRO MECHANICAL ENGINEERING

Dear Ladies and /or Gentlemen,


Pursuant to GCC Clause 24 (Completion of the Facilities) of the General Conditions of the Contract entered into between your selves and the Employer dated 07 July 2009; relating to the Construction of MV & LV distribution networks, we hereby notify you that the following parts of the Facilities were complete on the date specified below, and that, in accordance with the terms of the Contract, the Employer hereby takes over the said parts of the Facilities; together with the responsibility for care and custody and the risk of loss there of on the date mentioned below:

No.	Town Name	Voltage Level (KV)	Type of pole	Executed Length (KM)		Transformer Erected (KVA)	Commissioned Date (G.C)
				MV Line	LV Line		
1	Adece ejersa	33	Wooden	2.8	0.84	1*100	02/08/2011
2	Amate goro	33	Wooden	4.41	2.17	2*50	31/05/2012
3	Chole senkole	33	Concrete	0.4	2.5	1*200	19/06/2012
4	Ejersa	33	Concrete	4	2.21	1*50	19/06/2012
5	Gadula moye	33	Wooden	5.75	0.64	1*50	02/08/2011
6	Layi kanboicha	33	Concrete	58.04	3.24	2*50	31/05/2012
7	Lega hola	33	Concrete	5.2	2.54	1*50	16/08/2012
8	Mendida zytia	33	Wooden	0.77	1.4	1*50	02/03/2011
9	Mogoro	33	Wooden	2.1	2.08	1*50	31/05/2012
10	Sura	33	Concrete	4.3	3.83	2*50	19/06/2012
11	Tebo	33	Wooden	3.1	0.68	1*50	19/06/2012
12	Tuku & kora	33	Wooden	3.01	2.43	2*50	31/05/2012
13	Wantu	33	Wooden	1	1.36	1*25, 1*50	31/05/2012
14	Yeke saden	33	Concrete	6.93	3.77	1*50	19/06/2012
15	Chomiye	15	Steel	32.1	1.416	1*50	10/11/2011

However, you are required to complete the outstanding issues raised and delivered to you during the commissioning of the facilities as soon as practicable.

This letter does not relieve you of your obligation to complete the execution of the Facilities in accordance with the Contract nor of your obligations during the Defect Liability Period.



Very truly yours,

Chief Officer, UEAP Project Engineering

የኢትዮጵያ ኤሌክትሪክ ኃይል ኮርፖሬሽን
ETHIOPIAN ELECTRIC POWER CORPORATION

የቢሮ አድራሻ: ቤተ ግብርና ቅርንጫፍ 1233
የአዲስ አበባ ቅርንጫፍ አዲስ አበባ 21023
የኢሌክትሪክ ኃይል ኮርፖሬሽን አዲስ አበባ
ስልክ: 55 08 11 - 12

Head Office P.O. Box 1233-Addis
Ababa
Cable: Electric Addis Ababa
Telex: EEPKO Addis Ababa 21023
Telephone PBX 55 08 11 - 12

የደንበኛው ቅጽ: _____ የተጻፈበት ቀን: _____ የደንበኛው ቅጽ: _____
Your Ref: _____ Your letter dated _____ Our Ref: _____

10.5/10/147
31 JAN 2013
Date

Operational Acceptance Certificate

Contract UEAP B - 2/01 LOT- 6

To: HADU ELECTROMECHANICAL ENGINEERING.

Dear Ladies and /or Gentlemen,

Pursuant to GCC Clause 24 (Completion of the Facilities) of the General Conditions of the Contract entered into between yourselves and the Employer dated 07 July 2009, relating to the Construction of MV & LV distribution networks, we hereby notify you that the following parts of the Facilities were complete on the date specified below, and that, in accordance with the terms of the Contract, the Employer hereby takes over the said parts of the Facilities, together with the responsibility for care and custody and the risk of loss there of on the date mentioned below.

No.	Town Name	Voltage level (KV)	Executed Length (KM)		Transformer Erected (KVA)	Commissioned Date (G.C)
			MV Line	LV Line		
1	Adere ejersa	33	2.8	0.84	1*100	02/08/2011
2	Amate goro	33	4.41	2.17	2*50	31/05/2012
3	Chole senkole	33	0.4	2.5	1*200	19/06/2012
4	Ejersa	33	4	2.21	1*50	19/06/2012
5	Gadula moye	33	5.75	0.64	1*50	02/08/2011
6	Layi kanbolcha	33	56.04	3.24	2*50	31/05/2012
7	Lega hola	33	5.2	2.54	1*50	16/08/2012
8	Mendida zuria	33	0.77	1.4	1*50	02/03/2011
9	Mogoro	33	2.1	2.08	1*50	31/05/2012
10	Sura	33		3.83	2*50	19/06/2012
11	Tebol	33	3.1	0.68	1*50	19/06/2012
12	Tuku & kora	33	3.01	2.43	2*50	31/05/2012
13	Wantu	33	1	1.36	1*25, 1*50	31/05/2012
14	Yeke saden	33	6.93	3.77	1*50	19/06/2012
15	Chomiye	15	32.1	1.416	1*50	10/11/2011

However, you are required to complete the outstanding issues raised and delivered to you during the commissioning of the facilities as soon as practicable.

This letter does not relieve you of your obligation to complete the execution of the Facilities in accordance with the Contract nor of your obligations during the Defect Liability Period.

Very truly yours,
FARIS ADEM
Chief Officer, UEAP Project Engineering



Our Ref. HR &
Admin/430/03


June 2, 2016

Completion Certificate

This is to certify that Ato Mehari Admassu /Hadu E.M. Engineering/ had entered sub-contractual work to do Both the Civil as well as Electrical Works to construct a Street Light in Bonga Town with us. In our arrangement we have agreed to supply all the street light poles, Sodium Lamps, and cables while the sub-contractor /Mr. Mehari Admassu/ to do all the technical works.

Mr Mehari Admassu /Hadu E.M. Engineering/ taken part with a contract amount worth 10.23 million ETB and Completed within the given time frame. His services were recognizable and up to the standard and his payments were made on the basis of our agreement and time table.

We wish them success in any of their future endeavors.

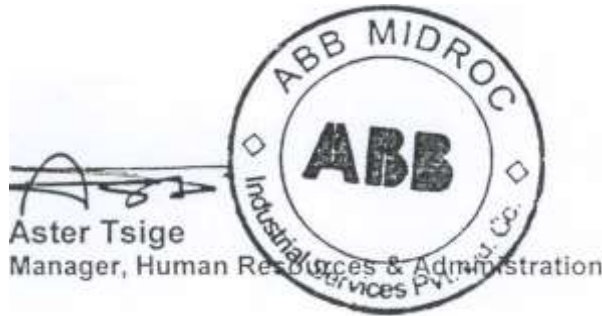

**KEC
INTERNATIONAL
LIMITED**

P. O. Box 25517, Code 1000
Wor. 17, Kebele 20, House No. 5332
Addis Ababa, Ethiopia
Tel/Fax: 00251 11 6263135
E-mail: kec.ethiopia@ethionet.et

Ref: - KEC/241/2011

Date: - 22/3/11

TO WHOM IT MAY CONCERN

This is to certify that HADU Electro-Mechanical Engineering has been working a contractual 33kv high voltage underground cable installation and 220V low voltage Street lightning works to electrify our employee's residential compound Pole manufacturing plant at Mojo-Adama area from October 2, 2016 to march 15, 2016.

Upon our agreement the company underwent 0.12 km UG cable installation and 104, 8m steel pole erection within the time basis we originally agreed on. And the necessary 2% service charge has been deducted and been paid to the responsive government offices.

This certificate is given as per their request,


B. Subrahmanyam
Project Manager
The stamp is circular with "KEC INTERNATIONAL LIMITED" at the top, "ETHIOPIA" in the center, and a star at the bottom.

PART THREE

3. ORGANIZATIONAL STRUCTURE, RESOURCE AND STAFF PROFILE

3.1 STAFF

The principal of the company is the presence of disciplined and dedicated manpower. Most of the company key staffs are permanently employed that ensure their job security. The company is staffed with professional who are qualified in their profession and they are mentioned hear below.

3.1.1 Staff members

No.	Name	Qualification	Experience in years	Position /Job title in the company
Managerial staff				
1	Mehari Admassu	B.Sc. in electrical Eng.	19 +	General manager
2	Addisu Dagne	BSc. in civil Eng.	23+	Project manager
3	Senait Tadele	B.Sc. in accounting	21+	Finance head
4	Belachew Admassu	Ma. In Business adm.	5+	Human resource & Business adm. head
5	Eden Berhane	BSc. in Health dept	12+	Health and Safety Manger
6	Wagaye Yasin	BA in accounting	32+	Accountant
Engineering staff				
7	Alem Arega	B.Sc. Degree in Electrical Engineering	8+	Project Engineer
8	Adnew Melese	BSC in Electrical Engineering (Tower erection and installation expert)	8+	Tower erection Expert

9	Taye Mamicha	12 complete (Tower erection and installation technician)	8+	Tower erection technician
10	Mengistu Tefera	12 complete (Installation Technician)	10+	Tower erection & installation technician
11	Temesgen Ewnetu	10+2 Electricity (Tower erection & installation technician)	11+	Foreman
12	Kasahun alemnew	10+2 in Electricity (Tower erection & installation technician)	18+	Foreman
13	Rahel Bizuwork	10+3 Diploma in surveying	9+	Surveyor
14	Girma G/egziabher	10+3 diploma in surveying	7+	Surveyor
15	Getye Tizazu workneh	Technique employee	11+	Tower erection technician
16	H/eyesus ayele	Driver	12+	Crane operator
17	Fikade Alemnew	Technique employee	9+	Tower erection technician
18	Awel Yimer	Technique employee	11+	Tower erection technician
19	Getye Tensaw	Technique employee	7	Technical works
Other necessary Technical and staffs and daily laborer shall be hired based on the volume of work on hand....				


HADU OSH Management System

An OSH management system is a set of interrelated or interacting elements to establish OSH policy and objectives, and to achieve those objectives. The application of a systems' approach to the management of OSH in workplace ensures that the level of prevention and protection is continuously evaluated and maintained through appropriate and timely improvements.

In order to create and maintain a safe and healthy working environment and comply with the OSH requirements pursuant to national laws and regulations, HADU encouraged to make appropriate arrangements for the establishment of an OSH management system.


The system should contain the main elements of policy, organizing, planning and implementation, evaluation and action for improvement, as shown in the figure below.

HADU Elector-Mechanical Engineering is structured in such a way to enhance its cooperated value and fulfill social responsibility. The company is currently headed with four deputies (HSE Manager, Finance head, Projects Head and Human resource).

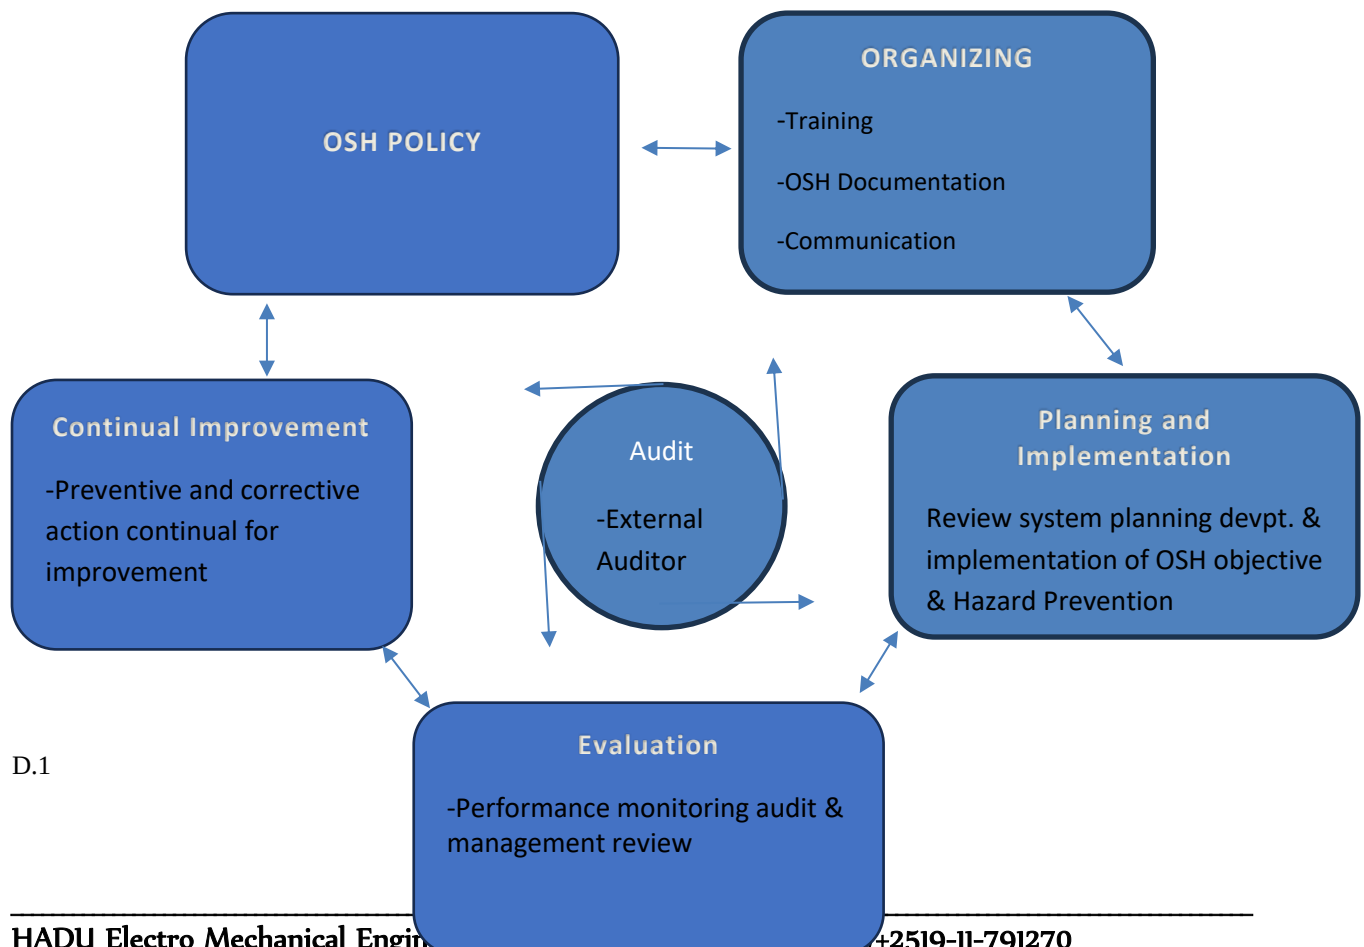


D.1

Competitive OSH guidelines provide a unique model, compatible with other management system standards and guides. It's approach and the principles defined in its international OSH instruments, particularly the Occupational Safety and Health Convention, Recommendation. Their purpose is to assist our organization a competent OSH organization in the achievement of continual improvement in OSH performance.

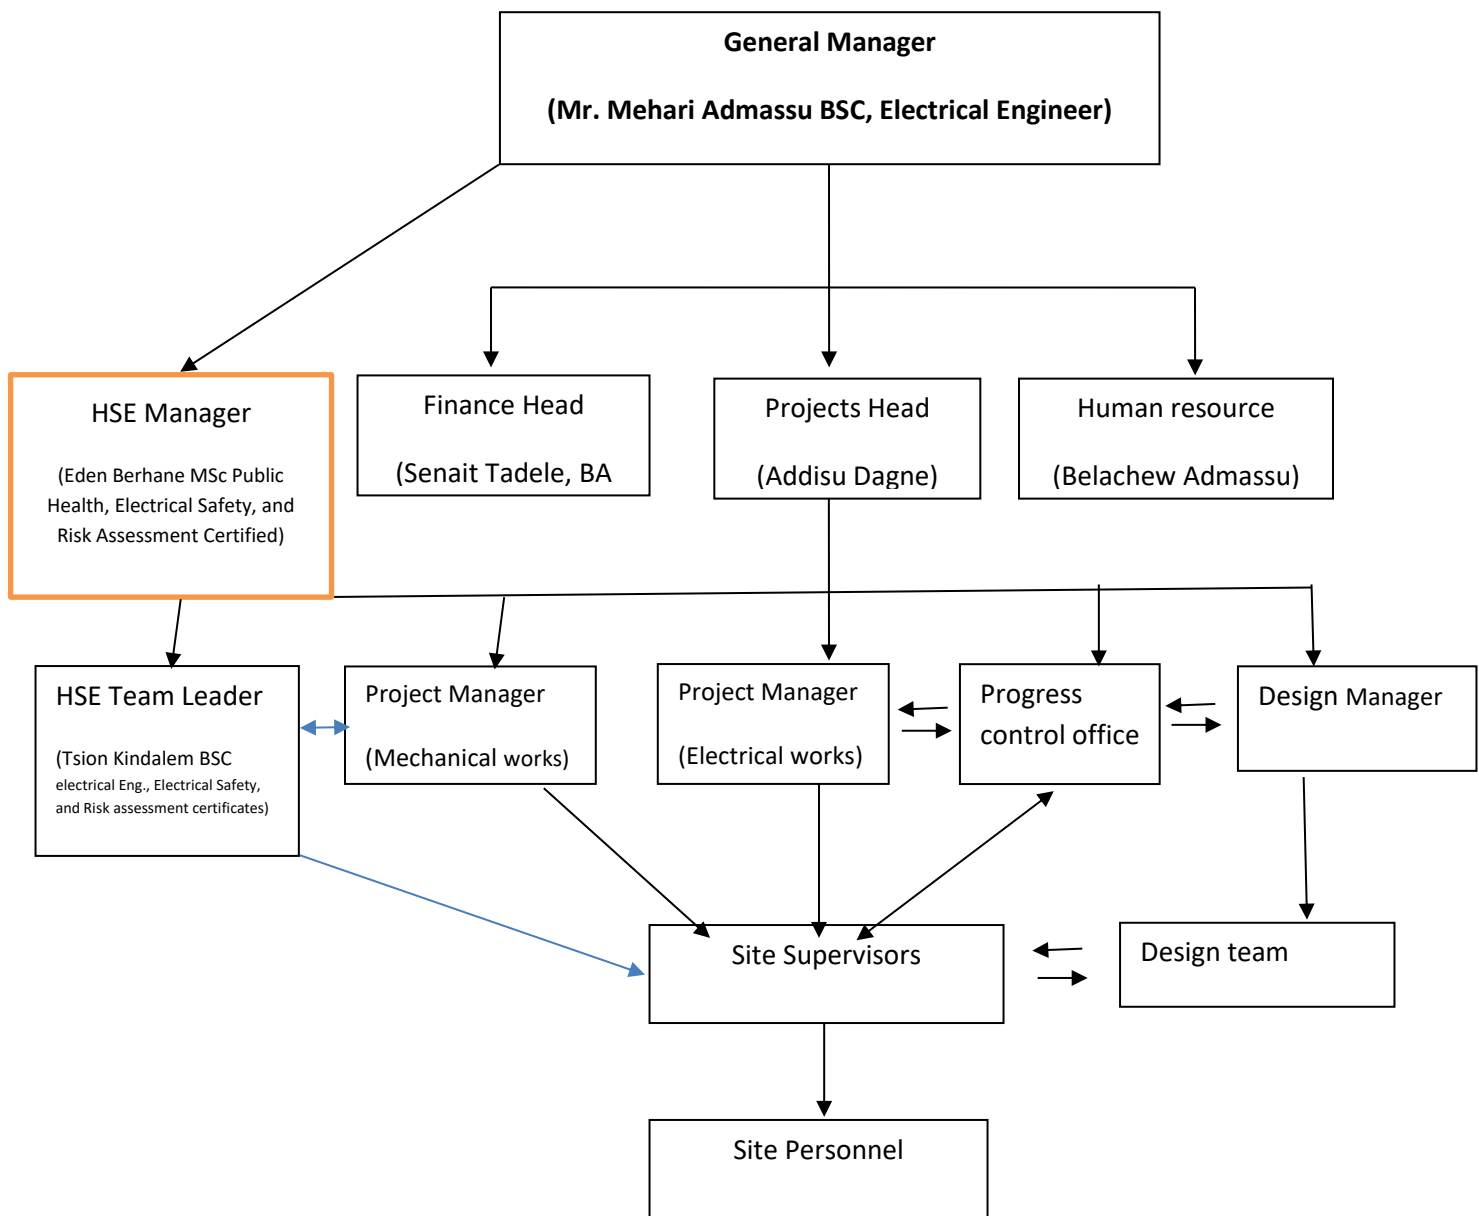

D.2

HSE(OSH) MANAGEMENT STRUCTURE

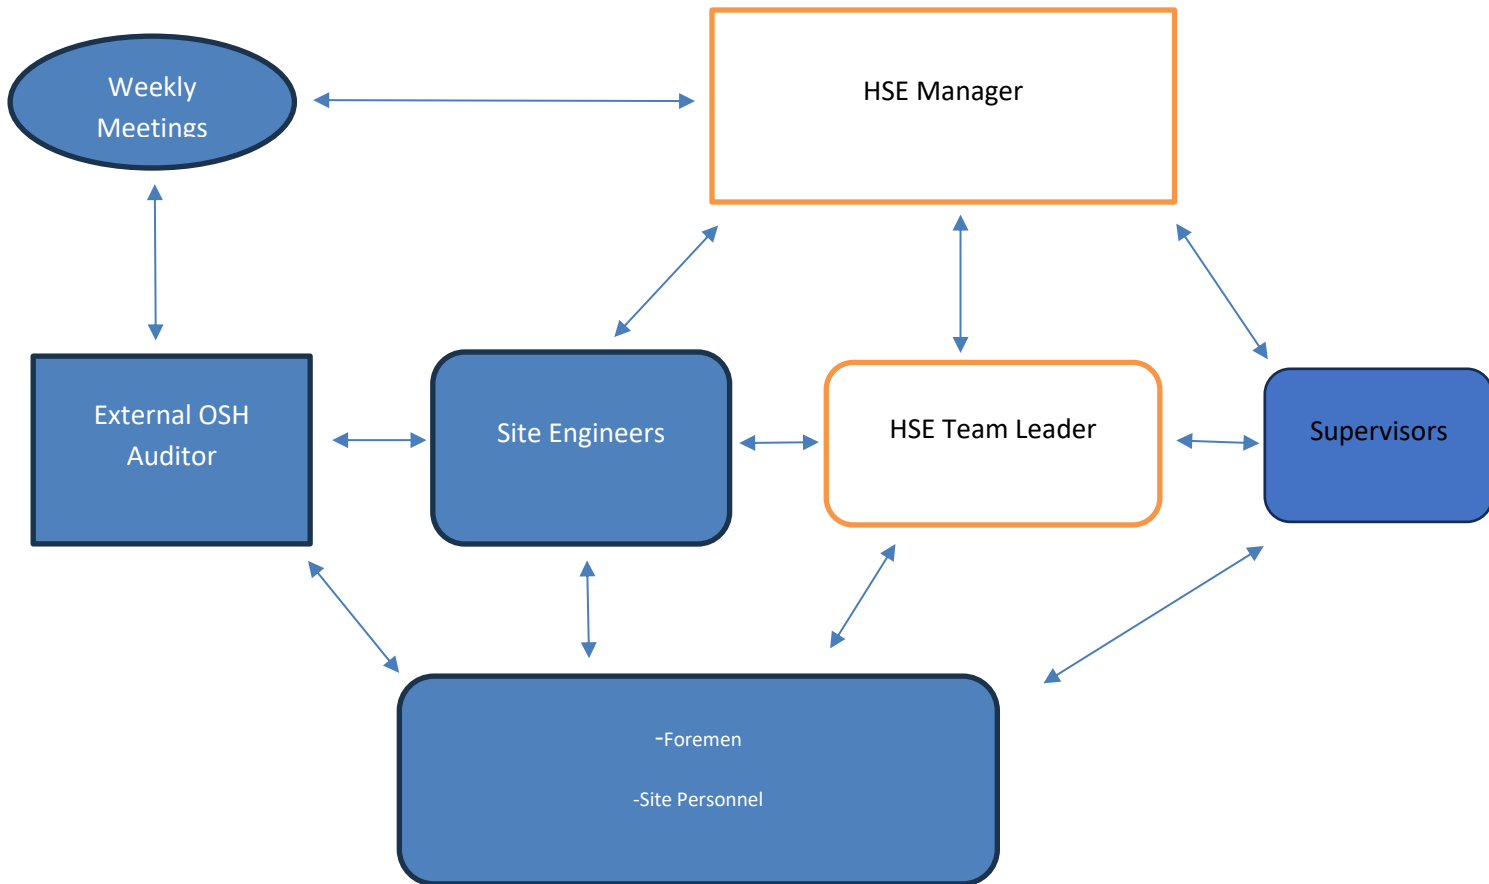

D.3

HADU OSH Personnel				
No	Name	Responsibility	Qualification	Remark
1	Eden Berhane	HSE Manager	MSC Public Health	
			Electrical Safety certificate	
			Risk Assessment certificate	
2	Tsion Kindalem	HSE Team leader	BSC Electrical Engineering	
			Electrical Safety certificate	
			Risk Assessment certificate	
3	Mulat Bekele	Site Engineer	BSC Electrical Engineering	
			Electrical Safety certificate	
			Risk Assessment certificate	
4	Asalfew Asfaw	Site Engineer	BSC Electrical Engineering	
			Electrical Safety certificate	
			Risk Assessment certificate	
5	Besufekad Mamo	Supervisor	Diploma Electricity	
			Electrical Safety certificate	
			Risk Assessment certificate	
6	Zerihun Melese	Supervisor	Diploma Electricity	
			Electrical Safety certificate	
			Risk Assessment certificate	
7	Haile W/Aregay	Supervisor	Diploma Electricity & Management	
			Electrical Safety certificate	
			Risk Assessment certificate	

3.2 Equipment, machinery financial document

No.	Description		Owned	Leased	Qty.
1	Truck mounted Crane 6 ton		1	-	4
2	Pick up		2	-	7
3	Welding Machine	Normal	1	-	24
		Arc welding machine	1	-	5
4	Crane		1	-	1
5	Asphalt Cutter		1	-	8
6	Jack Hammer		1	-	26
7	Concrete Mixer		-	1	7
8	Concrete Vibrator		-	1	7
9	Tool set		6	-	6
10	Vice		1	-	1
11	Hand drilling machine		1	-	
12	5 ton chain block		1	-	1
13	3 ton chain block		2	-	2
14	Scaffolding 6m		2	1	3
15	Scaffolding 4m		1	-	1
16	Wire strainer		6	-	6
17	Safety hard hats and kits		24	-	24
18	Generator 7KW		1	-	2

19	Foldable aluminum ladder	4	-	4
20	Leveler	2	-	2
21	Isuzu trucks	1	-	1
22	Safety belt	12	-	12
23	And others			

PART FOUR

PROPOSAL FOR THE PROJECT

4.1 Human resource and staff

HADU Electro Mechanical engineering (Belachew Admasu) will provide all the necessary personal and staff required by the work to accomplish it successfully with in the contract period.

4.2 Machineries and equipment's

HADU Electro Mechanical engineering () will provide all the necessary personal and staff required by the work to accomplish it successfully with in the contract period.

4.3 Work Methodology

It is a public record that HADU Electro-Mechanical engineering has been contributing exemplary works on both sort of Electrical as well as Mechanical works including Basic distribution line works in different parts of the country. And we received a sincere recommendation letters from different companies including Ethiopian electric power corporation (UEAP) for our approach of the work as well as speed of completion period.

Despite different approaches by different entities as well as companies towards method of executing the installation works, our deepest knowledge in the electrical installation work would help us approach the work in simple but effective techniques. Our company values the site preparation, design works and other paper work phases as important as the construction as well as testing and commissioning phases. And all pole pit locations and trenching paths will be well studied, prepared and will be based on the initial single line diagrams. And Hadu Electromechanical engineering will attempt to follow the following work schedule and methodology under normal and positive circumstances:

- Site preparation study phase: as we value all phases of the Methodology as important as the rest, in these phase of the work we examine the;
 - The feeder lines
 - Try to determine possible MV underground as well as overhead routes
 - Try to locate possible net station location based on load distribution
 - Making sure these MV lines are safely located and positioned
 - Arranging a store for construction tools as well as accessories shall be kept safe

And it is afterwards we proceed to the next phase as fast as possible and sometimes keep multiple works go simultaneously.

- The site surveying and preparation of single line diagrams: our surveying staffs do understand what it means to spot pole pit locations and how to be done as they have been doing it for quite some time. After spotting surveying work of both MV overhead and underground lines and net station location (Mini substation), we take those data collected to the drawing preparation stage so that the amount of accessories shall be determined by it gives other information as well.
- Transportation as well as supply of some accessories like Concrete and wooden pole:
- Pole pit for MV overhead lines and Pole erection phase: from our past experiences we have learnt that pole pit activity shall be immediately followed by pole erection so as to avoid

extra costs caused by multiple pole pits clearing and to avoid unsafe environment for animals as well as pedestrians caused by pole pitted holes.

- Trenching and laying PVC pipes: Based on the standards up to how the PVC pipes to be laid inside the trenched line, the PVC pipe shall be laid in straight lines inside the trenches. Even if it is shown in separate phase trenching and PVC laying shall be done also simultaneously with pole pit and erection phase so as to save considerable time if and only if it is done with complete supervision and precision and we are capable of doing.
- Clearing of site for compact substation: the site clearing, leveling of site for compact substation to be located and laying concrete blocks.
- Accessories fitting and stringing: All overhead accessories shall be transported to the site for fitting and AAAC and Bundled underground cables for stringing. Our company does understand the effect of quality cable jointing, proper tie wiring, checking insulators for cracks and others check to have a clean and fault free line. After cable trenching completed complete proper clamps, size of clamp and cable jointers will be used to connect AAAC with bundled underground cables.
- Compact substation Laying: the compact substation laying shall be done above an evenly laid concrete blocks and making sure all MV and LV terminals and connected to the correct port and connecting Transformer earthing system to ground.
- Pillar erection and Laying LV cables: as it is the final construction phases of the work methodology making sure every installation of distribution pillars, connecting them with cable terminals, fixing copper bars, fixing HRC fuse base and fuse and earthing the LV side of the system to ground shall be done properly.
- Commissioning work: Making sure all the accessories fitted, stringing, connections jointing, grounding, leveling of all terminals and systems properly one last time it shall be ready to be energize shall follow.
- Energizing and Site Handover: Despite we understand the importance and necessity of providing a one year extra guarantee the line shall be energized and back handover to the employer so that it can be used for the intended purpose.

Pic 1. Mrs. Tsion's Site Visit On
lookout for HSE Performance



Supervisor Briefing on Task and Safety protocol



Team getting ready for non-Live line work





